©Trelleborg Printing Solutions 072017

Printec® 3195

Pre-press advantages

- Knock-out areas without strings
- Fast and accurate cad cutting
- Easy to strip with clear and visible cut lines
- Easy to be handled and re-used

Press room advantages

- No fabrics pattern
- Reduced back trapping
- Softer surface and reduced hardness
- Consistent coating transfer over long runs

MAIN APPLICATION

Coating

Printec 3195: rubber-surface new coating plate, no fabrics

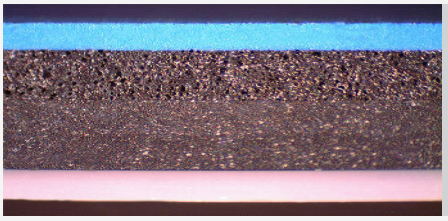

The product at a glance

COMPATIBILITY	Aqueous and UV coatings
PRINTING SURFACE COLOUR	Blue
SURFACE	Rubber
SURFACE ROUGHNESS (Ra micron)	0,6 micron
NOMINAL THICKNESS*	1,95 mm (0,077") +/- 0,05 mm (0,0002”).
CARRIER	Polyester
CARRIER THICKNESS	0,35 mm (0,014”)
CUTTING DEPTH	1,60 mm (0,063”)
ADDITIONAL INFORMATION	
CUTTING ADVISE	CAD cutting into the mylar might reduce mechanical properties of the coating plate

FOR ANY FURTHER DETAILS AND FOR A QUOTATION PLEASE REFER TO YOUR SALES MANAGER OR EMAIL US AT: printingsm@trelleborg.com

The information contained in this document is intended to provide guidance. The information is NOT a specification and all figures in the document are nominal.
This document and the information it contains do not create any warranties for any product and Trelleborg Printing Solutions disclaims any warranty of merchantability or fitness for a particular purpose for the product described in this document. This document discloses information that is proprietary to Trelleborg Printing Solutions. The receipt or possession of the document does not confer any right to reproduce or disclose the document, any information contained in it, or any physical article or device, or to practice any method or process except by written agreement with Trelleborg Printing Solutions. Trelleborg Printing Solutions is committed to the ongoing development of its products. For that reason, Trelleborg Printing Solutions reserves the right to alter the actual specifications of its products without prior notice.