

Technical specification sheet

Ball & Doggett
ballanddoggett.com.au

Product: Mastertac Dry Erase Lamination Film

Master **ac**


Category: Display & Visual

Technical specifications:

FEATURES AND ADVANTAGES:

- Clear high gloss PET film with adhesive back
- Compatible to laminate on graphics, perfect for white board marker and dry-erased
- Premium PET base, good weather resistance, excellent durable indoor use.

CONSTRUCTION DRAWING:

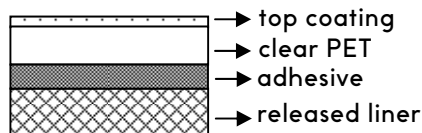

STANDARD SIZE:


1370mm x 50M

1520mm x 50M

PACKAGING:



3" core



lid-tray box

REWRITABLE DATA:

- Re-writable length of time: minimum 20,000 times
(tested with a whiteboard writing testing machine under ambient temperature and humidity)
- Erase Limitation: For normal whiteboard marker pen, marks can be dry erased off within one month. If the marker remains on the whiteboard beyond a month it can't be dry erased and will require additional cleaning solution: Whiteboard Cleaner or some alcoholic liquid.

ADHESION DATA:

GB/T 4852-2002- Test method for tack of pressure sensitive adhesive tapes by rolling ball 7#

PHYSICAL DATA:

Total thickness	140µm (±14)
Weight	140g/M2
Gloss 60°	(±14) [95, 115] High
Water resistance	Medium
UV resistance	

PROCESS AND STORAGE:

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed.

Relative high temperature

Operating ranges:

Long term (days, weeks)	60°C
Short term (minutes)	100°C