
HP Latex FS50 W Printer



Deliver stunning results with a superwide printer that scales as your business grows

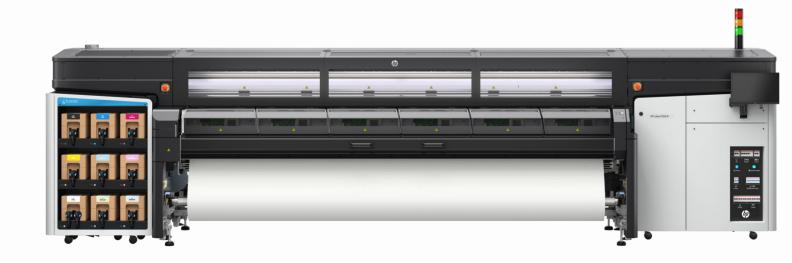

*Product image may differ from actual product

STUNNING-Quality that drives high margins

- You can grow into higher-margin jobs with up to 30% wider gamut 1 at high speed preserving media gloss, feel.
- Stand out with a wide range of signage and décor applications—thin films, vinyl, odourless² backlit textiles.
- Consistent colour and quality configurations across your global fleet with HP Configuration Center³.

SCALABLE-As your business grows

- Integrate future enhancements with a scalable platform ready to meet evolving business needs.
- Meet tight turnarounds with speeds up to $89 \,\mathrm{m}^2 \,(958 \,\mathrm{ft}^2) \,\mathrm{per}\,\mathrm{hour}^4 \,\mathrm{today}$.
- Minimise ink waste and streamline your workflow with auto printhead cleaning and an intuitive interface.
- Print remotely and monitor fleet with HP Live Production included in HP Professional Print Service Plan⁵

SUSTAINABLE-With environmental certifications

- This printer is built to last⁶ thanks to its scalable design.
- Create a comfortable workspace-waterbased inks enable odourless prints² and no hazardous air pollutants⁷.
- Stand out with an offering that meets environmental certifications like UL ECOLOGO®8 and UL GREENGUARD9.
- Contribute to the circular economy with HP Planet Partners¹⁰ and PVC alternative media profile database¹¹.

Messaging Footnotes

Based on testing commissioned by HP and performed by Venture Electronics Spain, comparing the gamuts of HP Latex Gen 4 inks with those of leading competitive alternatives using UV technology. Test performed under the same conditions in all printers measuring the ECI2002 target with the FD-9 spectrophotometer from Konica Minolta.

Based on testing commissioned by HP and performed by Odournet and applicable to HP Latex laks. Testing conducted according to VDI Guideline 3882 where 832 and 873 inks were characterised as "weak" in odour intensity and "neutral" for hedonic tone. There is a broad set of media with very different odour profiles. Some of the media can affect the odour performance of the final print.

HP Print Beat remote monitoring of production and analytics, HP PrintOS Mobile, and HP Configuration Center are available free of charge for all HP printers compatible with HP PrintOS. Requires an HP PrintOS account, Internet connection, and connected Internet-capable device. For more information, see http://www.printos.com.

**Based on internal HP testing, Outdoor mode 3-pass, 6-colour, 90%. While CMYK and Optimiser are duplicated with symmetrical double printheads, Overcoat, Light Magenta and Light Cyan rely on single printheads.

5-H PrintOS Live Production is available for subscribers of the HP Professional Print Services Plus Plan. Please consult your HP representative for information about availability and/or geographic coverage. Requires an HP PrintOS account, Internet connection, and connected Internet-capable device. For more information, see http://www.printos.com.

⁶Based on HP Large Format supplies Long Term Plan, at least 70% of printers installed, from the previous generation, are still in use in 2024. And on average printers in use are 6-7 years old and at least 50% of printers are

7HP Latex Inks were tested for Hazardous Air Pollutants, as defined in the Clean Air Act, per U.S. Environmental Protection Agency Method 311 (testing conducted in 2013) and none were detected.

8 UL ECOLOGO® Certified HP 832, HP 872, HP 873, and 882, FS50 and FS60 printer series Latex Inks meet a range of stringent human health and environmental considerations. For certifications, see

http://www.ul.com/EL and http://www.ul.com/gg.

9 Applicable to HP Latex Inks, UL GREENGUARD Gold Certification to UL 2818 demonstrates that products are certified to UL's GREENGUARD standards for low chemical emissions into indoor air during product usage. Unrestricted room size—full decorated room; 33.4 m² (360 ft²) in an office environment; 94.6 m2 (1,018 ft2) in a classroom environment. For more information, visit http://www.ul.com/gg or http://www.greenguard.org. For certifications, see http://www.greenguard.org. 10 Visit http://www.hp.com/recycle to see how to participate and for HP Planet Partners program availability; program may not be available in your jurisdiction. Where this program is not available, and for other

consumables not included in the program, consult your local waste authorities on appropriate disposal.

¹¹HP applications experts have evaluated the catalog of media listed in the HP Media Locator based on internal criteria to identify those that provide alternative solutions with certain environmental benefits compared to the typical media within the same application type. The information in media locator is provided by the media substrate vendors. HP is not responsible for the veracity of the information from third-party companies published on the HP website. See http://www.hp.com/go/mediasolutionslocator.

For more information, please visit http://www.hp.com/go/latex-fs50-series Join the community, find tools, and talk to experts. Visit the HP Latex Knowledge Center at https://lkc.hp.com/















Technical specifications

Applications Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Maximum roll weight: Up to 160 kg	Print	
Technology HP Latex Printing Technologies Ink types Water-based HP Latex Inks Print Cartridges/Bottle, Number Rolls S (black, cyan, light cyan, light magenta, magenta, yellow, HP Latex Optimiser, HP Latex Overcoat) S L (colour) upgradeable to 10 L with B3SG0A S (6 HP Latex Universal, 2 HP Latex Optimiser) Long-term print-to-print repeatability Media Applications Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Who to 100 kg (with optional durerter roller); Up to 2 x 70 kg (with optional dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Up to 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional diverter roller); Up to 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional diverter roller); Up to 2 x 200 kg (with optional diverter roller); Up to 2 x 200 kg (with optional diverter roller); Up to 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Thickness Banners, self-adhesive vinyls, films, papers, wallcoverings,	Print speed	m²/hr (6-pass); 38 m²/hr (8-pass); 29 m²/hr (10-pass); 54 m²/hr - White Spot (60%); 17 m²/hr - White Overflood (100%); 10 m²/hr -
Ink types Water-based HP Latex Inks Print Cartridges/Bottle, Number 8 (black, cyan, light cyan, light magenta, magenta, yellow, HP Latex Optimiser, HP Latex Overcoat) Print cartridge/bottle volume delivered 5 L (colour) upgradeable to 10 L with B3SG0A Printheads 8 (6 HP Latex Universal, 2 HP Latex Optimiser) Long-term print-to-print repeatability Maximum colour difference (95% of colours) ≤ 2 dE2000 Media Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Maximum roll weight: Up to 160 kg (single roll); Up to 300 kg (with optional diverter roller); Up to 2 x 70 kg (with optional dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,	Print resolution	Up to 1200 x 1200 dpi
Print Cartridges/Bottle, Number 8 (black, cyan, light cyan, light magenta, magenta, yellow, HP Latex Optimiser, HP Latex Overcoat) Print cartridge/bottle volume delivered 5 L (colour) upgradeable to 10 L with B3SG0A Printheads 8 (6 HP Latex Universal, 2 HP Latex Optimiser) Long-term print-to-print repeatability Maximum colour difference (95% of colours) ≤ 2 dE2000 Media Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll) kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Waximum roll diameter: 30 cm (40 cm with optional diverter roller); Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,	Technology	HP Latex Printing Technologies
Number Latex Optimiser, HP Latex Overcoat) Print cartridge/bottle volume delivered 5 L (colour) upgradeable to 10 L with B3SG0A Printheads 8 (6 HP Latex Universal, 2 HP Latex Optimiser) Long-term print-to-print repeatability Maximum colour difference (95% of colours) ≤ 2 dE2000 Media Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Up to 300 kg (with optional diverter roller); Up to 2 x 70 kg (with optional dual roll kit); Who to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Up to 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Thickness Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,	Ink types	Water-based HP Latex Inks
volume delivered Printheads 8 (6 HP Latex Universal, 2 HP Latex Optimiser) Long-term print-to-print repeatability Maximum colour difference (95% of colours) ≤ 2 dE2000 Media Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Up to 0 2 x 100 kg (with optional dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Maximum media width Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,		
Long-term print-to-print repeatability Media Applications Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Up to 300 kg (with optional diverter roller); Up to 2 x 70 kg (with optional dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Thickness Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,		5 L (colour) upgradeable to 10 L with B3SG0A
repeatability Media Applications Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1/2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Maximum roll weight: Up to 160 kg (single roll); Up to 300 kg (with optional diver roller); Up to 2 x 70 kg (with optional dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diver roller); Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Thickness Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,	Printheads	8 (6 HP Latex Universal, 2 HP Latex Optimiser)
Applications Exhibition and event graphics; Decoration; Displays; Exterior signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Maximum roll weight: Up to 160 kg (single roll); Up to 300 kg (with optional diverter roller); Up to 2 x 70 kg (with optional dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Maximum media width Sam (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,		Maximum colour difference (95% of colours) ≤ 2 dE2000
signage; Indoor posters; Banners; Light boxes - film; POP/POS; Textile; Vehicle graphics; Wallpaper; Window graphics Handling Roll-to-roll, double-sided blockout, dual-roll (optional), roll-to-freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional dual roll); Up to 2 x 1.53 m (optional diverter roller); Up to 6.0 kg (single roll); Up to 300 kg (with optional diverter roller); Up to 2 x 70 kg (with optional dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Thickness Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,	Media	
freefall (optional), ink collector (optional) Rolls Media rolls: 1 (2 with optional dual roll kit); Roll size: Up to 3.2 m (single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Maximum roll weight: Up to 160 kg (single roll); Up to 300 kg (with optional diverter roller); Up to 2 x 70 kg (with optional dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Thickness Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,	Applications	signage; Indoor posters; Banners; Light boxes - film; POP/POS;
(single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Maximum roll weight: Up to 160 kg (single roll); Up to 300 kg (with optional diverter roller); Up to 2 x 70 kg (with optional dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with optional diverter roller); Maximum media width 3.2 m (single roll); 2 x 1.60 m (optional dual roll); 2 x 1.53 m (optional jumbo dual roll) Thickness Up to 0.4 mm (default); up to 2.0 mm (with custom carriage height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,	Handling	
(optional jumbo dual roll) Thickness	Rolls	(single roll); Up to 2 x 1.6 m (optional dual roll); Up to 2 x 1.53 m (optional jumbo dual roll); Maximum roll weight: Up to 160 kg (single roll); Up to 300 kg (with optional diverter roller); Up to 2 x 70 kg (with optional dual roll kit); Up to 2 x 200 kg (with optional jumbo dual roll kit); Maximum roll diameter: 30 cm (40 cm with
height setting) Media types Banners, self-adhesive vinyls, films, papers, wallcoverings,	Maximum media width	
	Thickness	
	Media types	

Dimensions (W x D x H) Product 574 x 138 x 167 cm Shipping 586 x 181 x 191 cm Weight Product 1323 kg Shipping 2110 kg Included What's in the box HP Latex FS50 W Printer, printheads, 126-in spindles (x2), HP Internal Print Server, touch monitor, documentation software, user manual, media edge holders, Original HP sample media, cleaning supplies, pneumatic gun, User Maintenance Kit Environmental ranges Operating temperature 15 to 30°C Operating humidity 20 to 70% RH (non-condensing) Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental Weese, Schole, Centarking compliant Warranty One-year limited hardware warranty	Interfaces	Intel I210-T1 Gigabit Ethernet (1000Base-T)
Shipping 586 x 181 x 191 cm Weight Product 1323 kg Shipping 2110 kg Included What's in the box HP Latex FS50 W Printer, printheads, 126-in spindles (x2), HP Internal Print Server, touch monitor, documentation software, user manual, media edge holders, Original HP sample media, cleaning supplies, pneumatic gun, User Maintenance Kit Environmental ranges Operating temperature 15 to 30°C Operating humidity 20 to 70% RH (non-condensing) Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Dimensions (WxDxH)	
Weight Product 1323 kg Shipping 2110 kg Included What's in the box HP Latex FS50 W Printer, printheads, 126-in spindles (x2), HP Internal Print Server, touch monitor, documentation software, user manual, media edge holders, Original HP sample media, cleaning supplies, pneumatic gun, User Maintenance Kit Environmental ranges Operating temperature 15 to 30°C Operating humidity 20 to 70% RH (non-condensing) Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Product	574 x 138 x 167 cm
Product 1323 kg Shipping 2110 kg Included What's in the box HP Latex FS50 W Printer, printheads, 126-in spindles (x2), HP Internal Print Server, touch monitor, documentation software, user manual, media edge holders, Original HP sample media, cleaning supplies, pneumatic gun, User Maintenance Kit Environmental ranges Operating temperature 15 to 30°C Operating humidity 20 to 70% RH (non-condensing) Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Shipping	586 x 181 x 191 cm
Shipping 2110 kg Included What's in the box	Weight	
Included	Product	1323 kg
What's in the box HP Latex FS50 W Printer, printheads, 126-in spindles (x2), HP Internal Print Server, touch monitor, documentation software, user manual, media edge holders, Original HP sample media, cleaning supplies, pneumatic gun, User Maintenance Kit Environmental ranges Operating temperature 15 to 30°C Operating humidity 20 to 70% RH (non-condensing) Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, ROHS (EU, China, Ukraine), REACH, CE marking compliant	Shipping	2110 kg
Internal Print Server, touch monitor, documentation software, user manual, media edge holders, Original HP sample media, cleaning supplies, pneumatic gun, User Maintenance Kit Environmental ranges Operating temperature 15 to 30°C Operating humidity 20 to 70% RH (non-condensing) Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, ROHS (EU, China, Ukraine), REACH, CE marking compliant	Included	
Operating temperature 15 to 30°C Operating humidity 20 to 70% RH (non-condensing) Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, ROHS (EU, China, Ukraine), REACH, CE marking compliant	What's in the box	Internal Print Server, touch monitor, documentation software, user manual, media edge holders, Original HP sample media,
Operating humidity 20 to 70% RH (non-condensing) Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Environmental ranges	
Acoustics Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle) Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Operating temperature	15 to 30°C
Sound pressure Printing: 71 dB(A) (operating), 58 dB(A) (idle)	Operating humidity	20 to 70% RH (non-condensing)
Power Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Acoustics	
Consumption 12-13 kW (printing), 510 W (ready), 110 W (low power mode), 100 W (shutdown) Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Sound pressure	Printing: 71 dB(A) (operating), 58 dB(A) (idle)
Requirements Input voltage 200-240/380-415 V Delta/Wye three-phase and PE; 50/60 Hz; 56/35 A Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Power	
Certification Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, ROHS (EU, China, Ukraine), REACH, CE marking compliant	Consumption	
Safety IEC 62368-1 compliant; United States and Canada (CSA listed); EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1); Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Requirements	
EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1);" Ukraine (UA) Electromagnetic Compliant with Class A requirements: USA (FCC rules), Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Certification	
Canada (ICES), EU (EMC Directive), Australia (ACMA), New Zealand (RSM), Korea (KCC) Environmental WEEE, RoHS (EU, China, Ukraine), REACH, CE marking compliant	Safety	EU (MD compliant, EN60204-1, EN12100, EN13849-1, EN1010-1);
compliant	Electromagnetic	Canada (ICES), EU (EMC Directive), Australia (ACMA), New
Warranty One-year limited hardware warranty	Environmental	
	Warranty	One-year limited hardware warranty

Ordering information

Product		
9T923C	HP Latex FS50 W Printer	
Accessories	3	
3Y0K4A	HP Latex 2700/FS Ink Collector Kit	
474X9A	HP Latex 2700/FS Jumbo Dual Roll Kit	
474Y0A	HP Latex 2700/FS Ink Collector Foams Kit	
4J0X0A	HP 126-in Dual Roll Kit	
4R4W4A	HP 126-in Spindle	
4R4W5A	HP Latex 126-in Roll Freefall Kit	
4R4W7A	HP 126-in Diverter Roller	
55P20A	HP Latex 2700/FS Standard Uptime Kit	
55P21A	HP Latex 2700/FS White Uptime Kit	
55P22A	HP Latex 2700/FS User Maintenance Kit	
79D06A	HP Latex 2700/FS Edge Holder Kit	
B3SG0A	HP Latex FS Series High Capacity Ink Upg	
G1K80B	HP 126-in Dual Roll Spindle	
L2E28A	HP Latex Jumbo Dual Roll Split Spindles	
M2J33A	HP Latex In-Line Slitters	
T4E58B	HP Latex Media Saver Kit	
Original HP	orinting supplies	
8G4G4A	HP 883 5-liter Overcoat B Latex Ink Cartridge	
G0Z21A	HP 886 White Latex Printhead	
G0Z22A	HP 886 Optimiser Latex Printhead	
G0Z24A	HP 886 Latex Printhead	
G0Z28A	HP 883 5-liter Cyan Latex Ink Cartridge	
G0Z29A	HP 883 5-liter Magenta Latex Ink Cartridge	
G0Z30A	HP 883 5-liter Yellow Latex Ink Cartridge	
G0Z31A	HP 883 5-liter Black Latex Ink Cartridge	

HP 883 5-liter Light Cyan Latex Ink Cartridge

G0Z33A	HP 883 5-liter Light Magenta Latex Ink Cartridge
GOZ34A	HP 883 5-liter Optimiser Latex Ink Cartridge
G0Z35A	HP 883 5-liter Overcoat Latex Ink Cartridge
GOZ44A	HP 883 3-liter White Latex Ink Cartridge

Use Original HP inks and printheads, and HP large format printing materials, to experience consistent high quality and reliable performance that enable less downtime. These critical components are designed and engineered together as an optimized printing system, and Original HP inks are designed to maximize the life of HP printheads. Protect your HP printer investment by using Original HP inks for full HP warranty protection. For more information, visit https://hp.com/go/OriginalHPinks

Original HP large format printing materials

HP Photo-realistic Poster Paper

HP Photo-realistic Poster Paper HP Optimal Gloss Air GRP (REACH Compliant²) HP Removable Adhesive Fabric (REACH Compliant²) HP 15-oz Prime Double-sided Blockout Banner (REACH Compliant²) For the entire HP Large Format Printing Materials portfolio, please see HPLFMedia.com.

Service and Support

U95SKE HP 2 year Plus Service Plan Hardware Support w/DMR for HP Latex FS50

White (In Warranty)

U95SLE HP 3 year Plus Service Plan Hardware Support w/DMR for HP Latex FS50
White (In Warranty)

U95SME HP 4 year Plus Service Plan Hardware Support w/DMR for HP Latex FS50 White (In Warranty)
U95SNE HP 5 year Plus Service Plan Hardware Support w/DMR for HP Latex FS50

White (In Warranty)

HP Support Services offer installation and extended support services (e.g. 2, 3, 4, and 5 years). For more information, please visit http://www.hp.com/go/cpc

Specification Footnotes

1 Performance may vary depending on media—for more information, see http://www.hp.com/go/mediasolutionslocator . For best results, use textiles that do not stretch. The optional ink collector is required for porous

2 This product does not contain substances listed as SVHC (155) per Annex XIV of the EU REACH directive published as of June 16, 2014 in concentrations exceeding 0.1%. To determine the status of SVHC in HP products, see the HP REACH Declaration published at HP Printing Products and Consumable Supplies.

The product could differ from the images shown. © Copyright 2023 HP Development Company, LP. The Information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. In addition, our products and services come with guarantees that cannot be excluded under the Australian Consumer Law. Subject to the foregoing, nothing herein should be construed as constituting an additional warranty, HP shall not be liable for technical or editorial errors or omissions contained herein.



G0Z32A